



PL392P-A

Single-phase Motor Pre-Driver with RD Output

Applications


- For Automotive DC brushless motor

Features

- Built-in hall sensor
- Single phase full wave pre-driver
- Motor locked protection and automatic restart
- RD output
- Current limit
- Soft start function
- Built-in hysteresis comparator
- Built-in zener diode
- High balance and low thermal drift magnetic sensing
- Under voltage lock out protection
- RoHS compliance

Package: SOP-10F(strait pin)

4.9x3.9x1.4 (mm)



Specifications

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Conditions	Rating	Units
Maximum supply voltage	V _{DDmax}		20	V
Allowable power dissipation	P _d		833 ^{*1}	mW
Operating temperature range	T _a		-40~+125	°C
Storage temperature	T _s		-50~+150	°C
Max. high side output voltage(O1P,O2P)	V _{HOMAX}		40	V
Max. low side output voltage(O1N,O2N)	V _{LOMAX}		20	V
Max. output current (O1P,O2P,O1N,O2N)	I _{OMAX}		50	mA
Max. RD output voltage	V _{RDMAX}		20	V
Max. RD output current	I _{RDMAX}		10	mA
Max. input voltage(SS)	V _{INMAX}		6	V
VREF driving capability	I _{VREF}		5	mA
Junction Temperature	T _{JMAX}		150	°C

*1: Reduced by 6.67mW for each increase in Ta of 1°C over 25°C When mounted on 50mm x 50mm x 1.6mm glass epoxy board

◆ All PROLIFIC products described or contained herein do not have specifications that can handle applications require extremely high levels of reliability, such as life-support systems, aircraft control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your PROLIFIC representative nearest you before using any PROLIFIC products described or contained herein in such applications.

◆ PROLIFIC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, the rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all PROLIFIC products described or contained herein.

PROLIFIC TECHNOLOGY INC.


7F, No.48,Sec.3, Nan Kang Rd., Nan Kang, Taipei, 115, Taiwan.

Electrical Characteristics (T_A=25°C, V_{DD}=12V)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Units
Supply Voltage	V _{DD}		3.8		18	V
High side output current	I _{HS}	V _{OH} =12V	9	12	15	mA
Low side output High Voltage	V _{OH(ON)}	@ I _{OLUT} =10mA	V _{DD} -0.7	V _{DD} -0.4		V
Low side output Low Voltage	V _{OL(ON)}	@ I _{OUT} =10mA		0.4	0.7	V
Output Breakdown Voltage	V _{BV}		36			V
Supply Current	I _{DD}	Output open		6	10	mA
RD output voltage	V _{RD}				18	V
RD sink voltage	V _{DSRD}	R _{FG} =4.7K		0.2	0.3	V
VREF Voltage	V _{REF}	I _{REF} =-2mA	3.6	3.8	4.0	V
SS Voltage	V _{SS}		GND		VREF	V
SS discharge current	I _{SS}	V _{SS} =1V		0.5		uA
Current limit Voltage	V _{CL}		220	250	280	mV
Shutdown Time	T _{SD}		2.8	4.2	5.6	S
Restart Time	T _{RS}		0.2	0.3	0.4	S
Magnetic Characteristics (T_A=25°C, V_{LD}=12V)						
Operate Point	B _{OP}		-	15	35	G
Release Point	B _{RP}		-35	-15	-	G
Hysteresis	B _{HYS}		10	30	60	G

Truth Table

Parameter	Condition	O1P	O1N	O2P	O2N	RD	Mode
South Pole to Marking side	$B > B_{op}$	L	L	H	H	L	During rotation
North Pole to Marking side	$B < B_{rp}$	H	H	L	L	L	

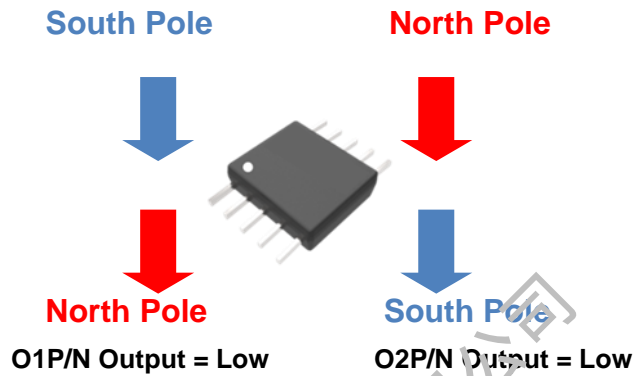

General Specifications

The PL392P is a single phase full wave driving motor pre-driver IC with built-in high sensitivity Hall sensor. The built-in dynamic offset cancellation of pre-amplifier stage achieves optimal symmetrical magnetic sensing. The pre-driver provides the controls and driving of High/Low side power MOSFET of motor. This IC is an optimal solution for widely DC brushless fan motor application.

Lock Protection

In order to protect the motor, the pre-driver IC will be shutdown to drive the coil when the motor is locked over 0.3 second. Then, it starts to drive the motor after 4.2 seconds. Figure 1 shows the timing diagram between the hall input signal and pre-driver's output state.

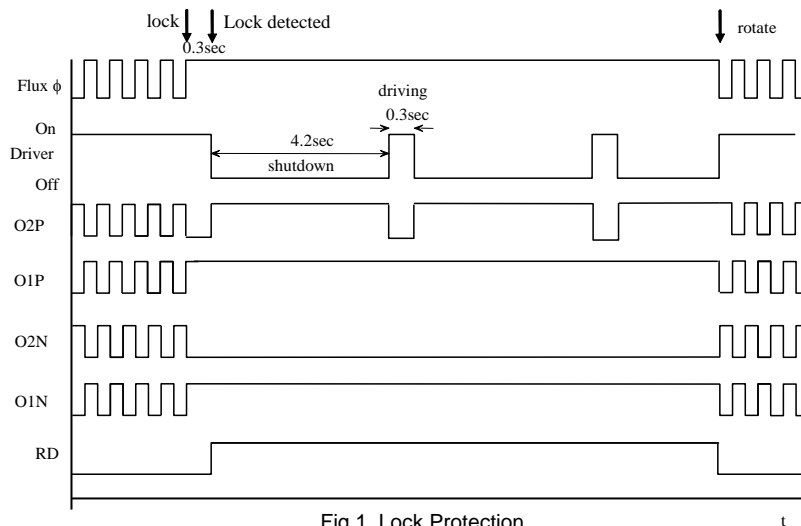


Fig 1. Lock Protection

Soft-Start function

The motor could be smoothly start-up when SS pin connecting a capacitor between VREF and SS pin. The Soft start function is released when the SS Voltage is lower than 0.5V. Therefore the soft-start timing changes depending on the capacitance of the soft-start setting capacitor. If the soft start function is not used, keeps this pin floating.

Current limit

This driver IC has built-in current limit function to protect Fan motor. The output current limit is activated when the current sensing voltage CS detected from RNF resistor exceeds 250mV (typical). The value of current limit is got by the formula $250\text{mV}/\text{RNF}$. Example, the maximum output current is limited at 1A when the current detecting resistor RNF is 0.25ohm. The value of current limit is adjustable to meet different need by RNF changing. If the $\text{RNF}=1\text{ohm}$, the value of current limit is 250mA.

$$\text{Current Limit (A)} = 0.25(\text{V}) / \text{RNF}(\Omega)$$

Low-pass filter constituted by R1,C1 could smooth RNF signal but also increase limit error due to sensing delay. R1,C1 value shall be decided first and match with coils. Then, adjust RNF resistor value to obtain ideal current limit value.

Hall Sensor

This Hall effect sensor IC integrates the sensor, pre-amplifier with dynamic offset cancellation and the hysteresis comparator in single chip. The hysteresis characteristic is illustrated in Fig. 2 and the threshold of the magnetic flux density is ± 15 Gauss.

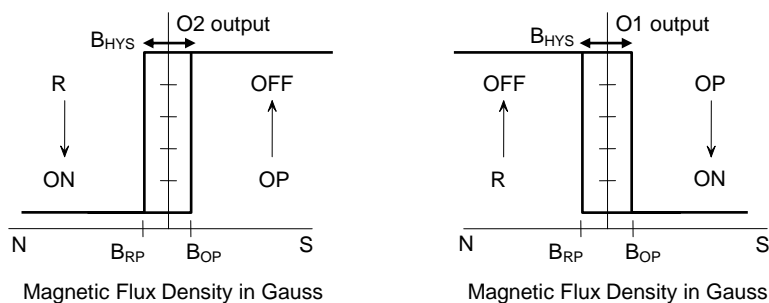


Fig 2. Magnetic Hysteresis Characteristics

The Pre-driver IC architecture block diagram is shown in Fig. 3.


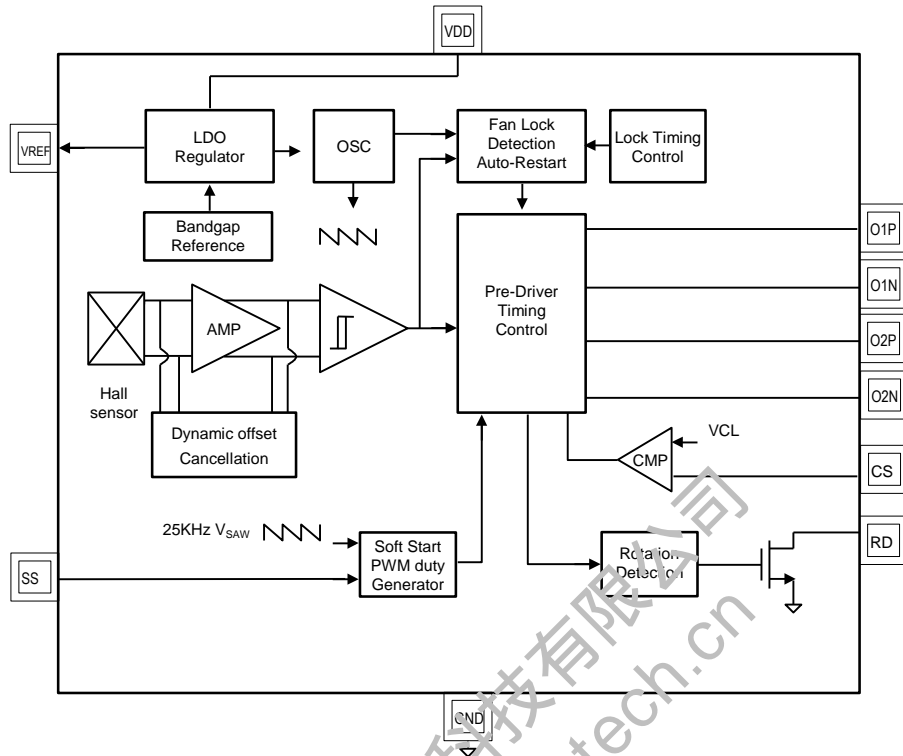


Fig3. Pre-Driver IC Architecture

Pin Description

Name	Pin	Description	Type
VREF	1	Reference voltage output	O
O1N	2	First low side output pin	O
O1P	3	First high side output pin	O
SS	4	Soft Start Setting pin	I
GND	5	Ground pin	P
O2P	6	Second high side output pin	O
CS	7	Current sensing input	I
O2N	8	Second low side output pin	O
RD	9	RD Output pin	O
VDD	10	DC power supply	P


Package specification

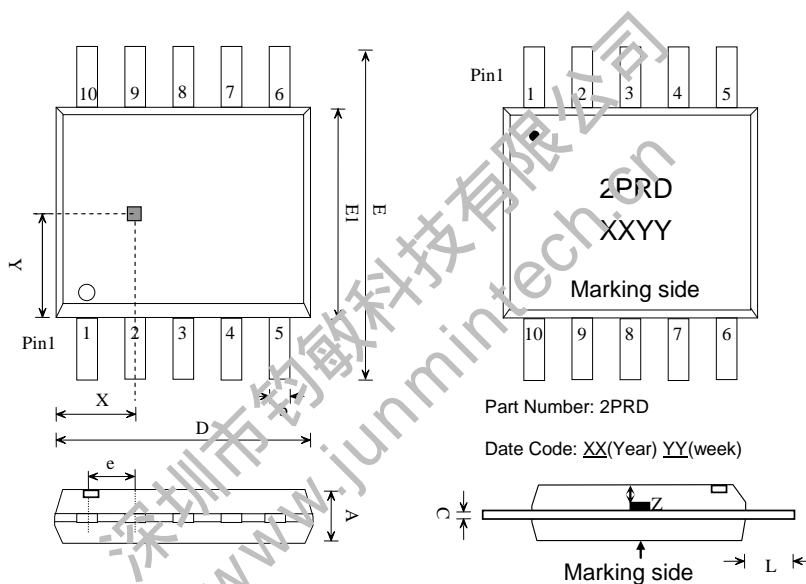


SYMBOLS	DIMENSIONS IN MILLIMETERS(mm)		
	MIN	NOM	MAX
A	1.25		1.50
b	0.30		0.45
C	0.10		0.25
D		4.90	
E	5.95		6.05
E1		3.90	
e	-	1.00	-
L	1.00	-	1.10
SENSOR LOCATION			
X	1.30	1.50	1.70
Y	1.65	1.85	2.05
Z	0.31	0.35	0.39

Performance curve


BOP_BRP vs. Ta

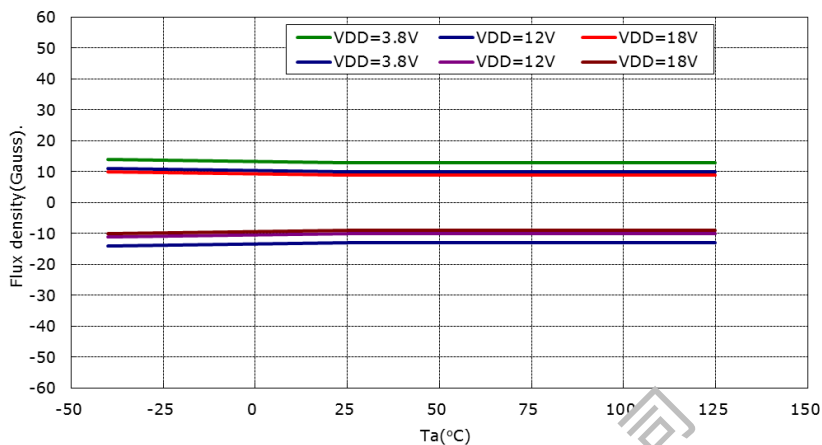


BOP_BRP vs. VDD

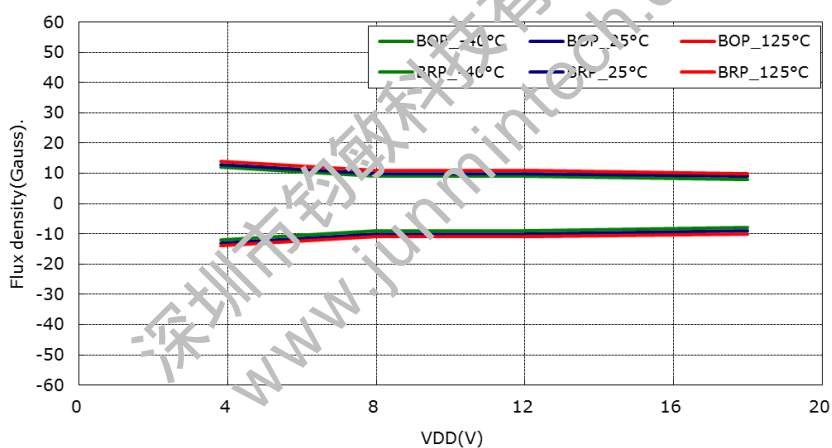


IDD vs. VDD

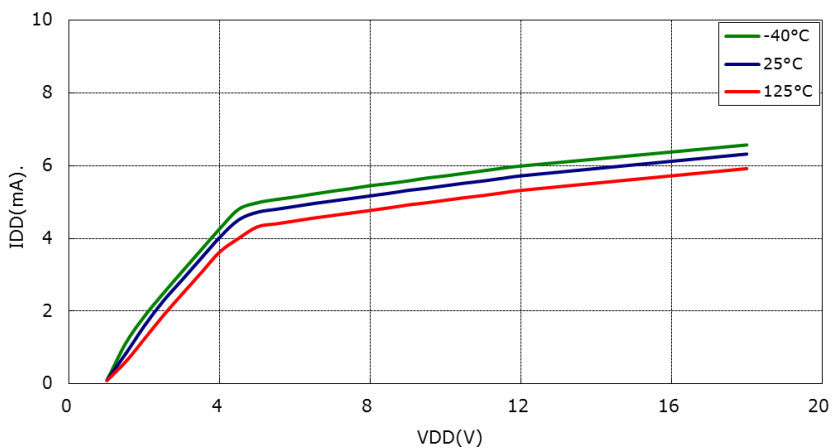


IDD vs. Ta

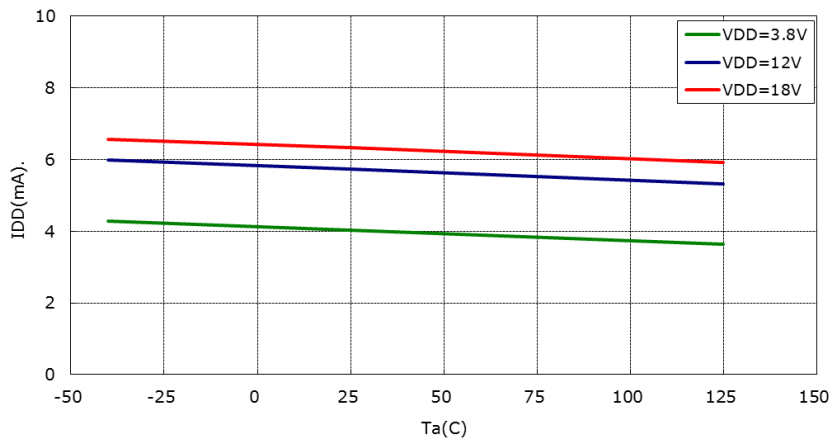


IHS vs. Ta

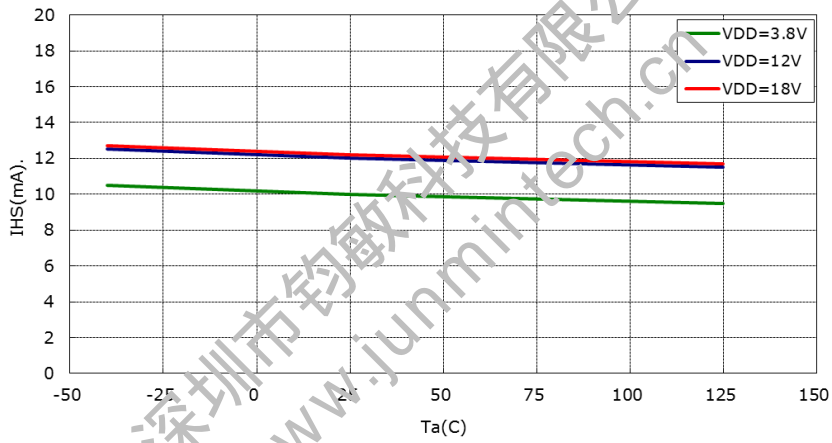


Lock Trs vs. VDD

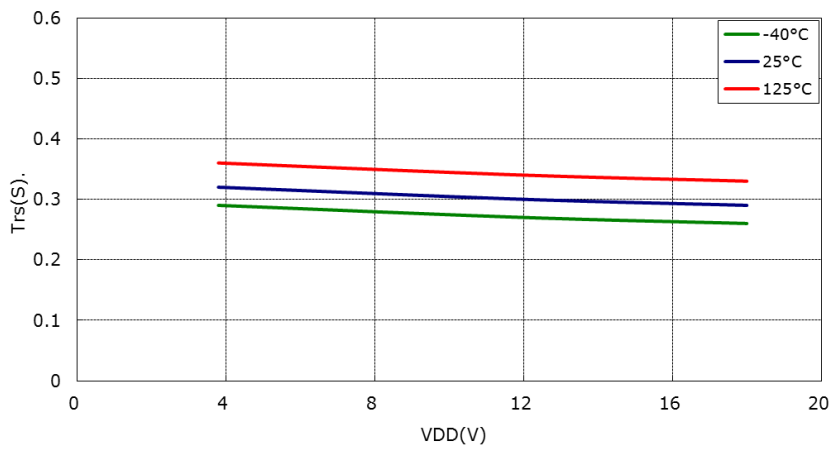


Lock Tsd vs. VDD

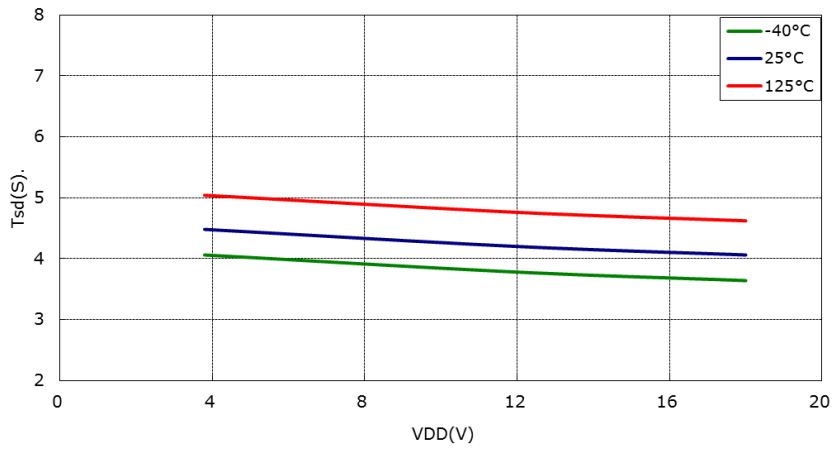


RD output sink voltage Vfg vs. Ird (VDD=12V)

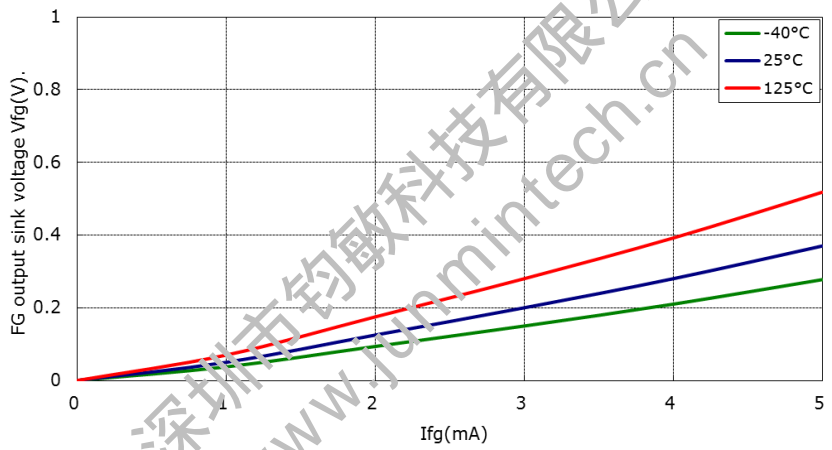

FG output sink voltage vs. Ird (Ta=25C)

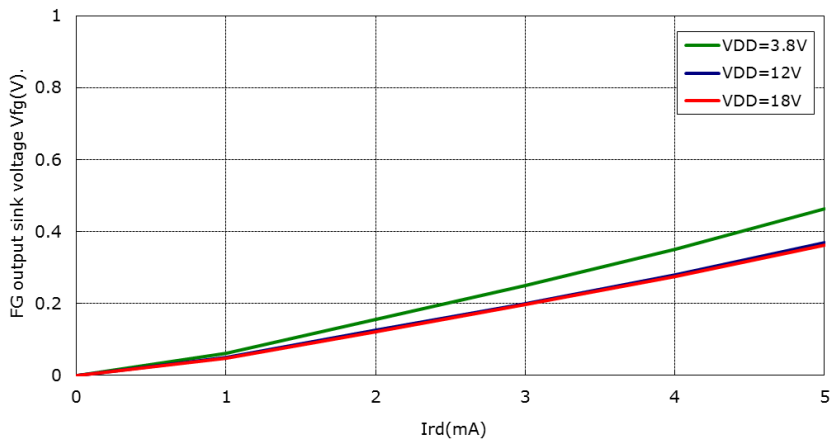


Application circuits
12V power supply

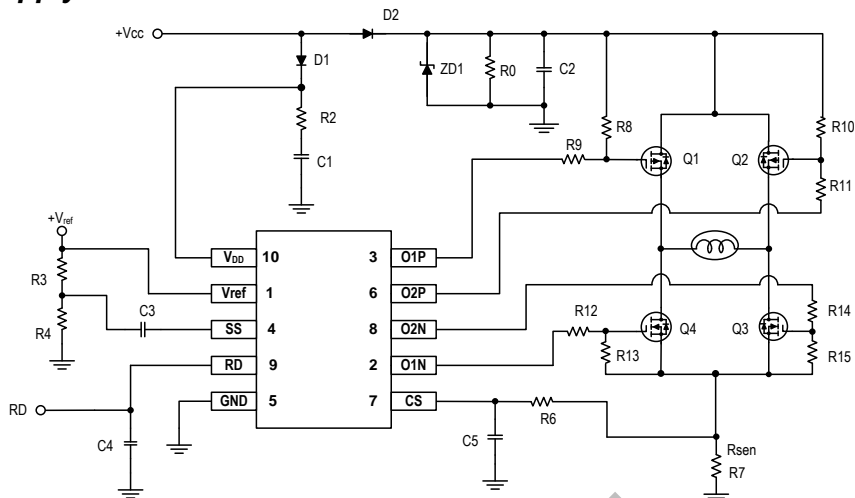

- R0: C2 Discharger resistor ;(option)
- C1: decoupling capacitor 0.1uF ~ 1uF
- R2: Snubber circuit resistor 3.3ohm~10ohm
- R7(RNF): Current sensing resistor (ex. 0.25ohm for 1A current limit)
- R6, C5: Low pass filter (ex. C1=1n~0.01uF, R1=1K~10K; need to match with coil)
- R9, R11, R12, R14: MOSFET slew rate adjustment, 0~100ohm
- R13, R15: NMOSFET gate stabilization, 4.7K ~15Kohm
- C4: 0.001uF(Option)
- R8, R10: PMOSFET Bias, 560~1Kohm
- ZD1: recommend 30V Zener Diodes(option)
- C2: Back EMF filter 1uF~2.2uF

24V power supply

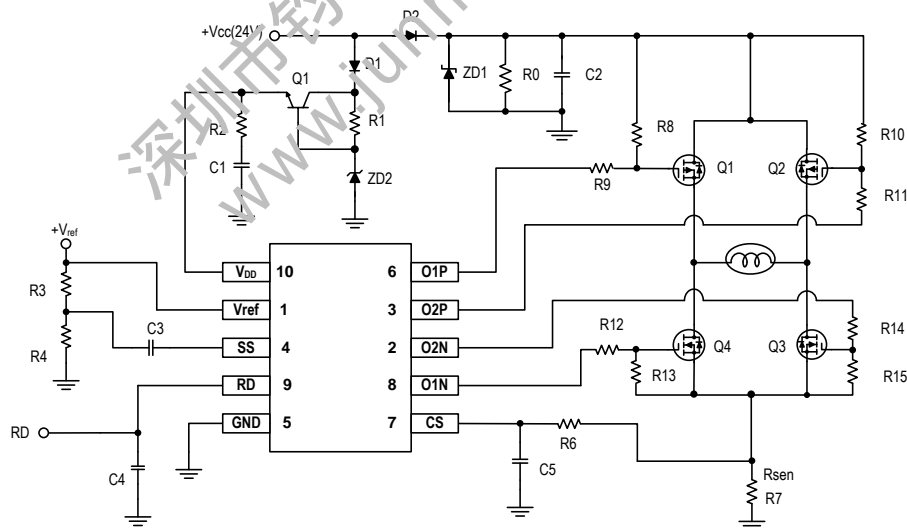


- R0: C2 Discharger resistor ;(option)
- C1: decoupling capacitor 0.1uF ~ 1uF
- R2: Snubber circuit resistor 3.3ohm~10ohm
- R7(RNF): Current sensing resistor (ex. 0.25ohm for 1A current limit)
- R6, C5: Low pass filter (ex. C1=1n~0.01uF, R1=1K~10K; need to match with coil)
- R9, R11, R12, R14: MOSFET slew rate adjustment, 0~100ohm
- R13, R15: NMOSFET gate stabilization, 4.7K ~15Kohm
- C4: 0.001uF(Option)
- R8, R10: PMOSFET Bias, 560~1Kohm
- ZD1: recommend 30V Zener Diodes
- ZD2: 12V or 15V Zener Diodes
- C2: Back EMF filter 1uF~2.2uF

Thermal resistance

Parameter	Symbol	Conditions	Rating	Units
Allowable power dissipation	P_d		833 ^{*1}	mW
Junction to ambient thermal resistance	θ_{JA}	2s0p PCB, still-air	150	°C/W
Junction to case thermal resistance	θ_{JC}		50	°C/W
Maximum junction temperature	T_{Jmax}		150	°C


*1: Reduced by 6.67mW for each increase in Ta of 1°C over 25°C When mounted on 50mm x 50mm x 1.6mm glass epoxy board

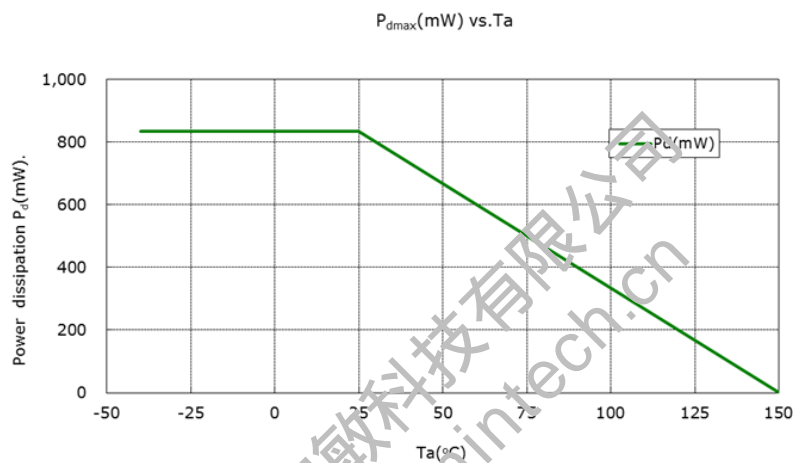

Soldering recommendations

1. JEDEC J-STD-20
2. Iron Soldering
Temperature and Time: 350°C, 3S
3. Reflow

Temperature profile should conform to described in JEDEC-020 standard

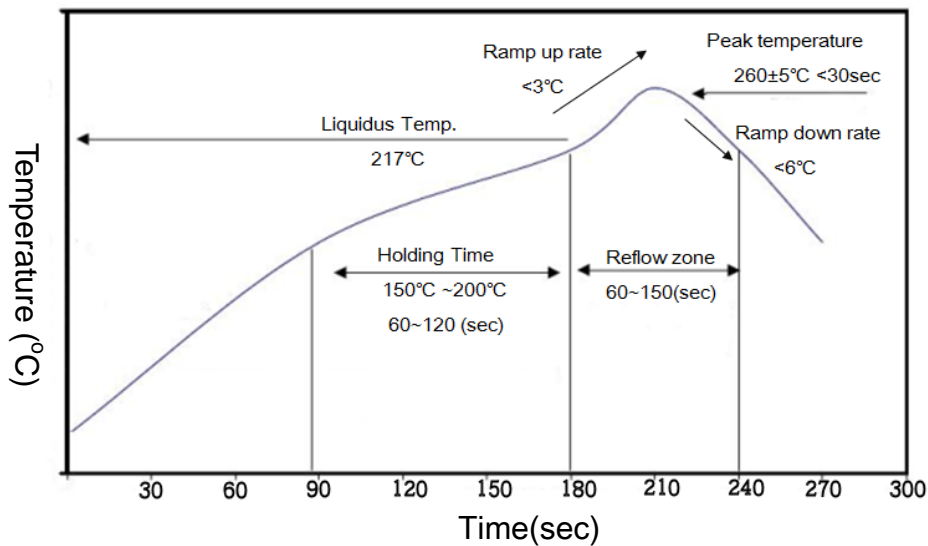

Order information

Product	Temp. Code	Package Code	MOQ
PL392P-ARD	K(-40°C~+125°C)	PR(SOP-10F, Reversed)	12.5K EA/BOX

Please issue order Part No. like : **PL392P-ARDKPR.**

- ◆ Specifications of any and all PROLIFIC products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- ◆ PROLIFIC Technology Inc. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- ◆ In the event that any and all PROLIFIC products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Taiwan, such products must not be exported with our obtaining export license from the Ministry of international Trade and Industry in accordance with the above law.
- ◆ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of PROLIFIC Technology Inc.
- ◆ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the Delivery Specification for the PROLIFIC product that you intend to use.
- ◆ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. PROLIFIC believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Specifications and information herein are subject to change without notice.